


BOOTED (CAST - IN) RESILIENT STRUCTURE CONNECTION

12" -36" HDPE N-12

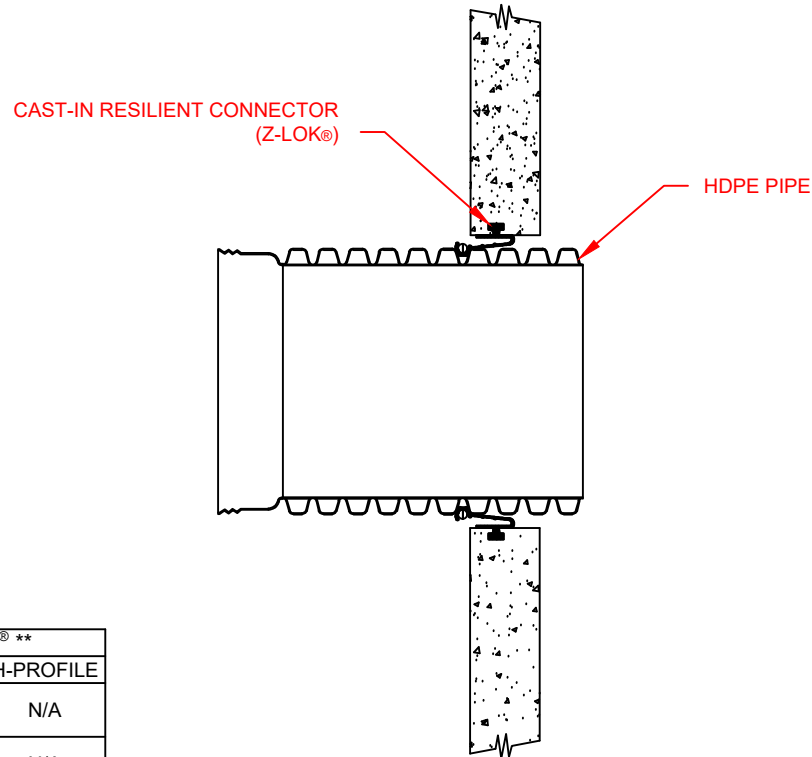

PIPE SIZE	PIPE OD		Z-LOK® **	
	A-PROFILE	H-PROFILE	A-PROFILE	H-PROFILE
12" (300mm)	14.5" (368mm)	N/A	8016	N/A
15" (375mm)	17.6" (447mm)	N/A	8019	N/A
18" (450mm)	21.2" (538mm)	N/A	8022	N/A
24" (600mm)	27.8" (706mm)	N/A	8029	N/A
30" (750mm)	35.1" (892mm)	N/A	8039	N/A
36" (90mm)	41.1" (1044mm)	41.4" (1052mm)	8045	8045

** THIRD PARTY - CODES AS SUPPLIED BY MANUFACTURER
Z-LOK is a registered trademark of A-LOK® Products, Inc. (www.a-lok.com)

NOTES:
PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 HDPE CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

CHECK LOCAL A/H PROFILE AVAILABILITY WITH ADS REP

6	UPDATED NOTES	AMT	07-24-19		
REV.	DESCRIPTION	BY	MM/DD/YY	CHK'D	

© 2019 ADS, INC.

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

**12"-36" HDPE N-12 Z-LOK BOOTED
(CAST-IN) STRUCTURE CONNECTION**

DRAWING NUMBER: STD-204D



4640 TRUEMAN BLVD
HILLIARD, OHIO 43026

DRAWN BY:	CKS
DATE:	10/10/06
CREATED BY:	
SCALE:	NTS
SHEET:	1 OF 1