


BOOTED (CAST-IN) RESILIENT STRUCTURE CONNECTION 12" - 30" DUAL WALL HP STORM W/ CORRUGATED PIPE ADAPTER GASKET

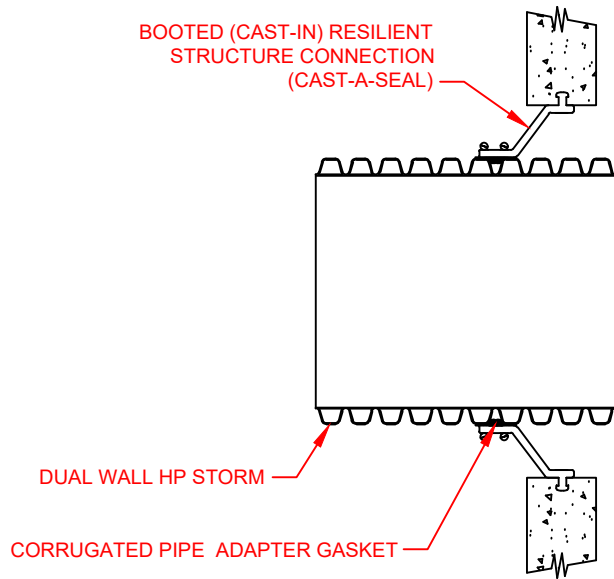

PIPE SIZE	PRESS SEAL® SYSTEMS	
	CORRUGATED PPE ADAPTER GASKET	CAST-A-SEAL *
12" (300mm)	1250PS	CAS 802
15" (375mm)	1550PS	CAS 802
18" (450mm)	1850PS	CAS 802
24" (600mm)	2450PS	CAS 802
30" (750mm)	3050PS	CAS 802

NOTES:

PERFORMANCE HIGHLY DEPENDENT ON INSTALLATION. CONTRACTOR MUST ENSURE MANHOLE GASKET IS UNIFORMLY SEATED AROUND STRUCTURE ADAPTER. EXTRA PRECAUTIONS MUST BE TAKEN TO PREVENT DIFFERENTIAL SETTLEMENT BETWEEN THE PIPE AND MANHOLE.

SEE STANDARD DETAIL STD-201 AND TECHNICAL NOTE: 5.04 CONNECTIONS TO MANHOLES AND STRUCTURES FOR INSTALLATION RECOMMENDATIONS.

* THIRD PARTY - CODES AS SUPPLIED BY MANUFACTURER
 KOR-N-SEAL is a registered trademark of NPC, Inc. (www.npc.com)
 CAST-A-SEAL is a registered trademark of PRESS-SEAL GASKET CORPORATION. (www.press-seal.com)
 PSX Systems are a product of PRESS-SEAL GASKET CORPORATION. (www.press-seal.com)

© 2019 ADS, INC.

6	UPDATED DETAIL AND TABLE	AMT	09-09-19	
REV.	DESCRIPTION	BY	MM/DD/YY	CHKD

ADVANCED DRAINAGE SYSTEMS, INC. ("ADS") HAS PREPARED THIS DETAIL BASED ON INFORMATION PROVIDED TO ADS. THIS DRAWING IS INTENDED TO DEPICT THE COMPONENTS AS REQUESTED. ADS HAS NOT PERFORMED ANY ENGINEERING OR DESIGN SERVICES FOR THIS PROJECT, NOR HAS ADS INDEPENDENTLY VERIFIED THE INFORMATION SUPPLIED. THE INSTALLATION DETAILS PROVIDED HEREIN ARE GENERAL RECOMMENDATIONS AND ARE NOT SPECIFIC FOR THIS PROJECT. THE DESIGN ENGINEER SHALL REVIEW THESE DETAILS PRIOR TO CONSTRUCTION. IT IS THE DESIGN ENGINEERS RESPONSIBILITY TO ENSURE THE DETAILS PROVIDED HEREIN MEETS OR EXCEEDS THE APPLICABLE NATIONAL, STATE, OR LOCAL REQUIREMENTS AND TO ENSURE THAT THE DETAILS PROVIDED HEREIN ARE ACCEPTABLE FOR THIS PROJECT.

12"-30" HP STORM BOOTED (CAST-IN) STRUCTURE CONNECTION W/ CORR PIPE ADAPTER GASKET

DRAWING NUMBER: STD-207C



4640 TRUEMAN BLVD
 HILLIARD, OHIO 43026

DRAWN BY:	JAB
DATE:	4/3/09
CHKD BY:	
SCALE:	NTS
SHEET:	1 OF 1