





N-12® FLEX

THE FLEXIBILITY CONTRACTORS WANT. THE FLOW RATES FARMERS NEED.



 Industry Best Flow Rates.	 More Flow. Less Pipe.	 Simpler & Safer Installs.	 Reduced Operating Costs.
<p>12%¹ better flow rates than the flexible dual-wall pipe industry average.</p> <p>84%² better flow rates than single wall pipe.</p>	<p>Increased flow capacity enables more flow from a smaller diameter pipe, when compared to single wall.</p>	<p>Eliminates the need for open trenching, increasing safety and installation speed.</p>	<p>Decreases the amount of material, labor, and equipment needed, reducing overhead and operating costs.</p>


Inside Diameter in. (mm)	Outside Diameter in. (mm)	Coil Length ft. (m)*	Solid	Reg. Perf (Drilled)	Fine Slot
8" (203)	9.5" (241)	920' (280)	●	n/a	●
10" (254)	12" (305)	550' (280)	●	n/a	●
12" (305)	14.2" (361)	360' (101)	●	●	●
15" (381)	17.7" (450)	165' (50)	●	●	●

¹Based on internal testing of six known suppliers of flexible dual wall pipe.

²Based on internal testing.

*Coil length applicable to U.S. production only.

FLEX DUAL WALL SPECIFICATIONS

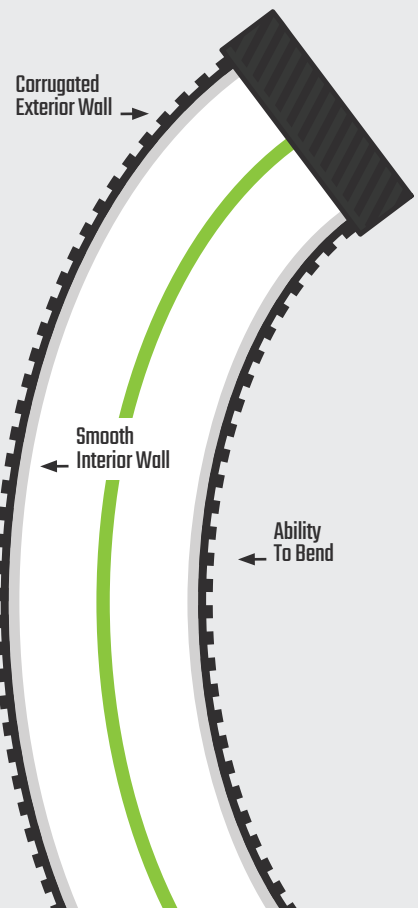

THE MOST ADVANCED NAME IN WATER MANAGEMENT SOLUTIONS™

stripes.ads-pipe.com/n-12-flex ► 800-821-6710

